

**FEATURES**

- Resistances from 1 Ohms to 47kOhms
- Power Rating 5 to 225Watts
- Resistance Tolerances to  $\pm 5\%$
- Options:
  - Special Tolerances
  - Ayrton-Perry / Non-Inductive Windings
  - Fixed / Tapped / or Adjustable
  - Quick Connect Terminals
  - Mounting Brackets




Pb-free  
Available  
**RoHS\***  
COMPLIANT

**TABLE 1 – SPECIFICATIONS**

Resistance Range	1 $\Omega$ to 47kOhms
Tolerances	$\pm 5\%$ Standard ( Call Factory for Other Tolerances )
Temperature Coefficient	>5R : $\pm 200$ ppm/K 1R to 5R : $\pm 260$ ppm/K
Temperature Range	-55°C to +350°C
Dielectric Strength	1000 VAC
Overload	10X Rated Power / 5s

**FIGURE 1 – DERATING**

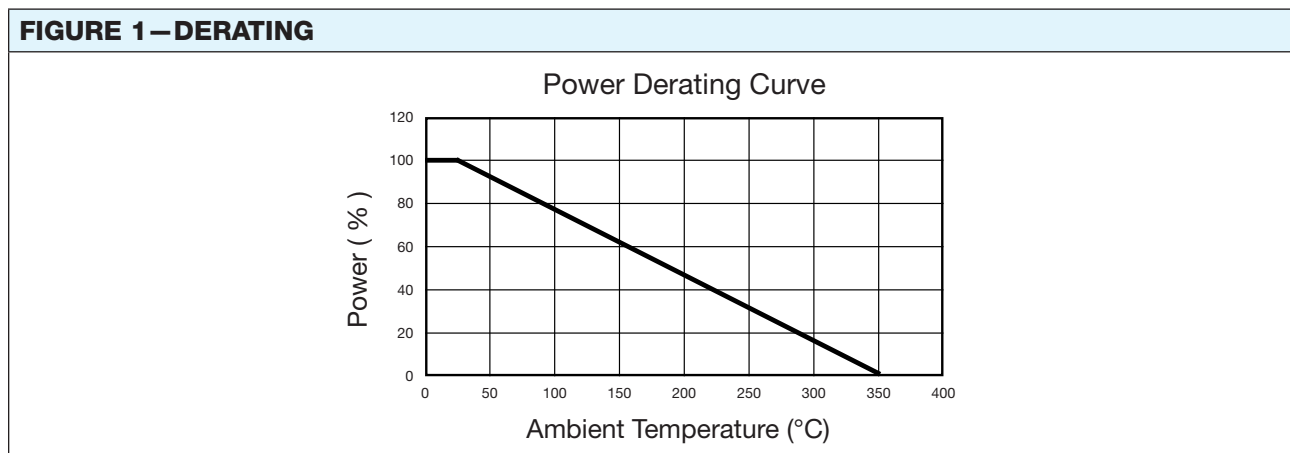

**ORDERING INFORMATION**


**Part Number - Resistance - Tolerance - TCR ( If not standard ) - Quick-Connects - Brackets**

TSC-75 100 Ohm 5% QC BKTS  
 For Non-Inductive Windings / insert the letter "N" ( i.e. TSCN-50 )  
 TSC-50 and larger parts are Available with 0.250 x 0.032 Quick Connect Terminal / Add "QC" to the Part Number.  
 Push-in friction grip mounting brackets are Available / Add "BKTS" to Part Number

**FIGURE 3 – DIMENSIONS**

Type	Wattage Rating	Resistance Range <sup>1</sup>	Dimensions			Terminal Size	BKTS - Mounting Dimensions		
			A ±0.062" [±1.6mm]	B ±0.031" [±0.8mm]	C ±0.062" [±1.6mm]		K ±0.062" [±1.6mm]	M ±0.062" [±1.6mm]	C ±0.020" [±0.5mm]
TSC-5	5	1R - 1k	0.312 [7.9]	0.188 [4.8]	1.00 [25.4]	T1	-	1.44 [36.6]	0.146 [3.7]
TSC-10	10	1R - 1k	0.312 [7.9]	0.188 [4.8]	1.75 [44.4]	T1	0.938 [23.8]	2.19 [55.6]	0.146 [3.7]
TSC-20	20	1R - 10k	0.438 [11.11]	0.250 [6.35]	2.00 [50.8]	T1	-	2.50 [63.5]	0.146 [3.7]
TSC-25	25	1R - 10k	0.563 [14.3]	0.312 [7.9]	2.00 [50.8]	T2	1.688 [42.9]	2.75 [69.9]	0.161 [4.1]
TSC-25A	30	1R - 10k	0.750 [19.1]	0.500 [12.7]	2.00 [50.8]	T2	2.312 [58.7]	2.88 [73.2]	0.161 [4.1]
TSC-25B	30	1R - 10k	0.625 [15.9]	0.453 [11.5]	2.00 [50.8]	T2	1.688 [42.9]	2.63 [66.8]	0.161 [4.1]
TSC-50	50	1R5 - 15k	0.563 [14.3]	0.312 [7.9]	4.00 [102]	T2	1.688 [42.9]	4.75 [121]	0.161 [4.1]
TSC-50A	60	1R5 - 15k	0.750 [19.1]	0.500 [12.7]	4.00 [102]	T2	2.312 [58.7]	4.88 [124]	0.196 [5.0]
TSC-50B	70	1R5 - 15k	0.750 [19.1]	0.547 [13.9]	4.50 [114]	T2	2.312 [58.7]	5.38 [137]	0.196 [5.0]
TSC-75	75	1R5 - 15k	0.563 [14.3]	0.312 [7.9]	6.00 [152]	T2	1.688 [42.9]	6.75 [171]	0.161 [4.1]
TSC-75A	90	2R7 - 20k	0.750 [19.1]	0.500 [12.7]	6.00 [152]	T2	2.312 [58.7]	6.88 [175]	0.196 [5.0]
TSC-100	100	2R7 - 20k	0.750 [19.1]	0.500 [12.7]	6.50 [165]	T2	2.312 [58.7]	7.38 [187]	0.196 [5.0]
TSC-130	130	2R7 - 20k	1.125 [28.6]	0.750 [19.1]	6.50 [165]	T3	2.812 [71.4]	7.38 [187]	0.196 [5.0]
TSC-160	175	3R3 - 39k	1.125 [28.6]	0.750 [19.1]	8.50 [216]	T3	2.812 [71.4]	9.38 [238]	0.196 [5.0]
TSC-200	225	3R3 - 47k	1.125 [28.6]	0.750 [19.1]	10.50 [267]	T3	2.812 [71.4]	11.38 [289]	0.196 [5.0]

<sup>1</sup> For non-inductive windings / divide maximum resistance by 2

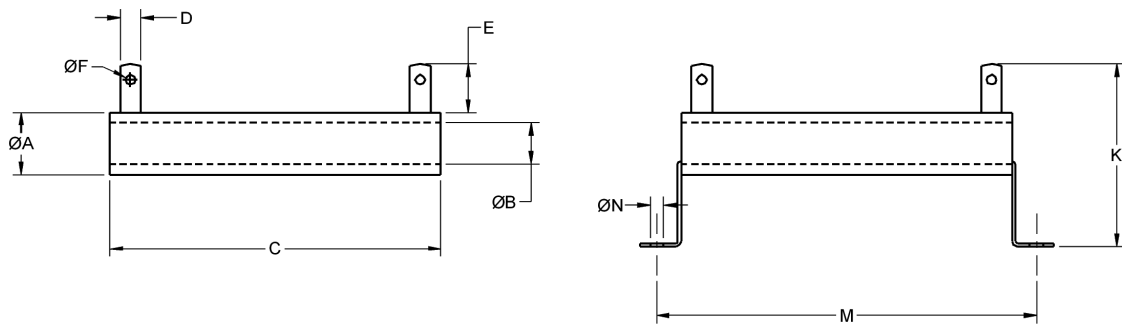

Terminal Size	D ±0.010" [±6.4mm]	E ±0.032" [±0.8mm]	F ±0.005" [±0.13mm]
T1	0.188 [ 4.8 ]	0.438 [ 11.1 ]	0.104 [ 2.6 ]
T2	0.250 [ 6.3 ]	0.563 [ 14.3 ]	0.166 [ 4.2 ]
T3	0.312 [ 7.9 ]	0.625 [ 15.9 ]	0.196 [ 5.0 ]



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.